


# extriCARE® 2400 NPWT Foot Dressing Application Guide

#### **EC2400 - F Components:**

- 1 x Spoon-Shaped Dressing Pad
- 1 x Skin Drape (35x28cm)
- 1 x Suction Bell with Skirt with connection tubing (200cm) & Clamp
- 1 x Silicone Gel Strip Pack
- 4 x Nonwoven Dressing Toe Dividers



#### **Application Instructions:**

Clean the wound bed (according to facility protocol) with alcohol-free prep and the assess wound size and type. Apply skin sealant to the area surrounding the wound bed.

**Optional:** You may treat the edges of the wound with hydrocolloids for a better seal.



Place silicone strips in a contiguous pattern around the foot proximal to the body from the wound bed. Make sure to remove the red backing and the strips overlap each other to completely encircle the foot.



IFU30.0009 Rev. B 20140313





3. Place the small rectangular dressing pieces between the toes. Use petroleum jelly or ointment on top of the toes to protect the toenails.



4. Trim the circular portion of the dressing to fit the wound.




Place the circular portion on the wound bed. Wrap the rectangular piece around the foot to the dorsal side. Trim the excess.





Apply the film over the foot by peeling back one side of the first layer. Have the patient step onto the drape so that the toes face the fold and the adhesive reaches the gel strips. Remove the remaining side of the first layer and fold over on top of the foot.

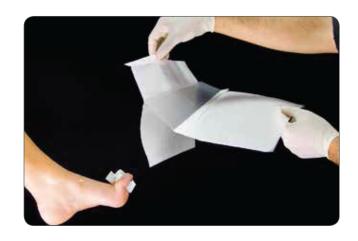

7. After the foot is completely encased in the film, pat down around the edges to ensure a good seal.



Carefully remove the second layer of the film backing once on the foot.





Once applied, pinch the skin drape over the dressing and cut a hole approximately 2cm wide.



**10.** Remove the backing layers from the Suction Bell Skirt.



Place the Suction Bell opening directly over the hole in the drape with tubing at the desired angle.



Tel: +852 3166 7200

Fax: +852 2355 7663

www.allevamedical.com



**12.** Attach the connector tubing to the Suction Bell. Connect the tubing to the extriCARE® NPWT pump. Power the pump on and set the approximate pressure.

